


NOTES:

1. ALL AXLES, ROLLERS AND PIVOT POINTS ARE EQUIPPED WITH LIFE-TIME LUBRICATED BEARINGS.
2. LIFT TO BE PAINTED AQ STANDARD ENAMEL.
3. MEETS OR EXCEEDS ANSI MH29.1 STANDARD FOR INDUSTRIAL SCISSORS LIFTS.

(2) VERTICAL CYLINDERS WITH VELOCITY FUSES.

SELF-CONTAINED POWER UNIT WITH NEMA 4 PENDANT "UP-DOWN" PUSHBUTTON WITH 10'-0" STRAIGHT CORD AND REMOVABLE 20'-0" POWER CORD.

MODEL NO:	CMD-30
MAX CAPACITY:	3,000 lbs.
LOWERED HEIGHT:	5 3/8"
TRAVEL:	50"
RAISED HEIGHT:	55 3/8"
POWER UNIT, CONTROLS, AND ACCESSORIES PER QUOTATION.	

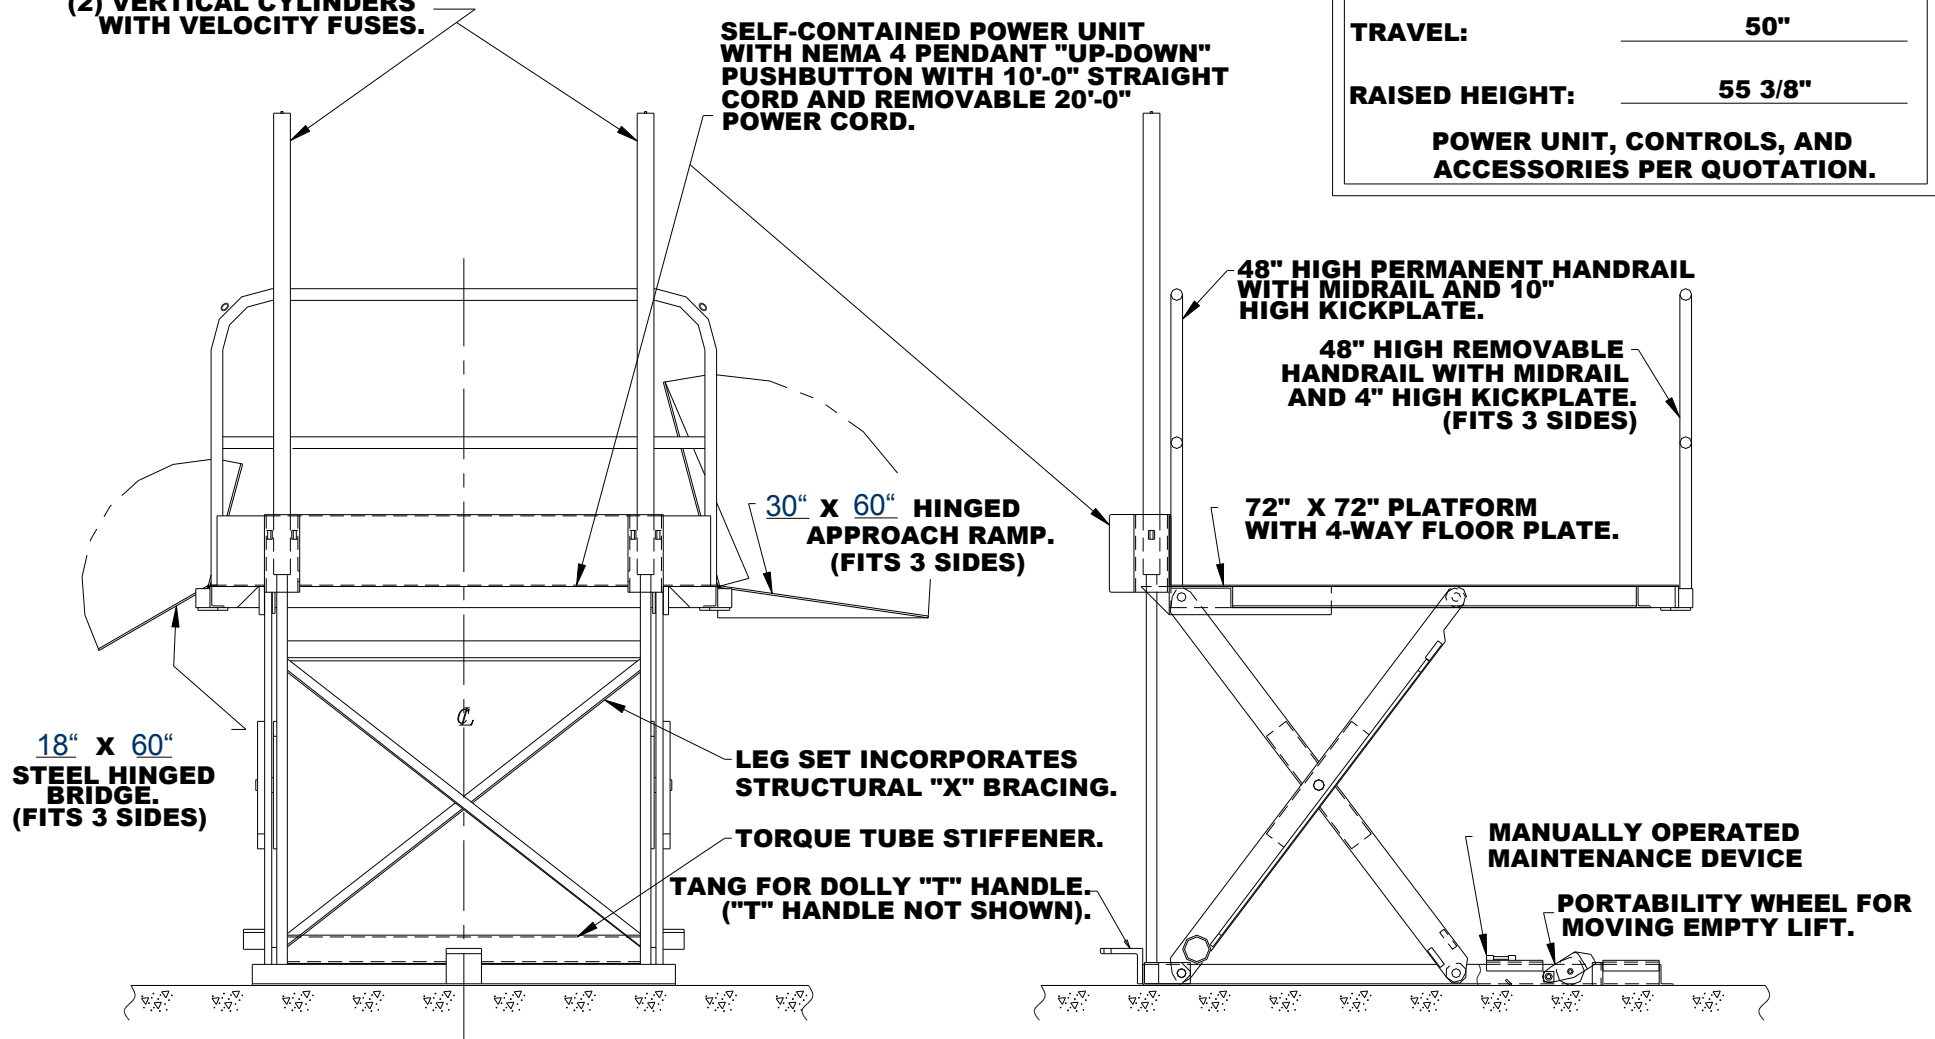

(NOT TO SCALE)

PROPOSAL DRAWING

QUOTE NO. SC4660

826-0032-0 REV 2, 10/1/01

CMD - PORTABLE DOCK LIFT



AUTOQUIP CORP.

1058 W.INDUSTRIAL AVE.

GUTHRIE, OK 73044-1058

888-811-9876 WWW.AUTOQUIP.COM

© COPYRIGHT RESERVED
 AUTOQUIP CORPORATION
 2001