

**NOTES:**

1. ALL AXLES, ROLLERS AND PIVOT POINTS ARE EQUIPPED WITH LIFE-TIME LUBRICATED BEARINGS.
2. LIFT TO BE PAINTED AQ STANDARD ENAMEL.
3. MEETS OR EXCEEDS ANSI MH29.1 STANDARD FOR INDUSTRIAL SCISSORS LIFTS.

MODEL NO: \_\_\_\_\_


MAX CAPACITY: \_\_\_\_\_

LOWERED HEIGHT: \_\_\_\_\_

TRAVEL: \_\_\_\_\_

RAISED HEIGHT: \_\_\_\_\_

POWER UNIT, CONTROLS, AND ACCESSORIES PER QUOTATION.

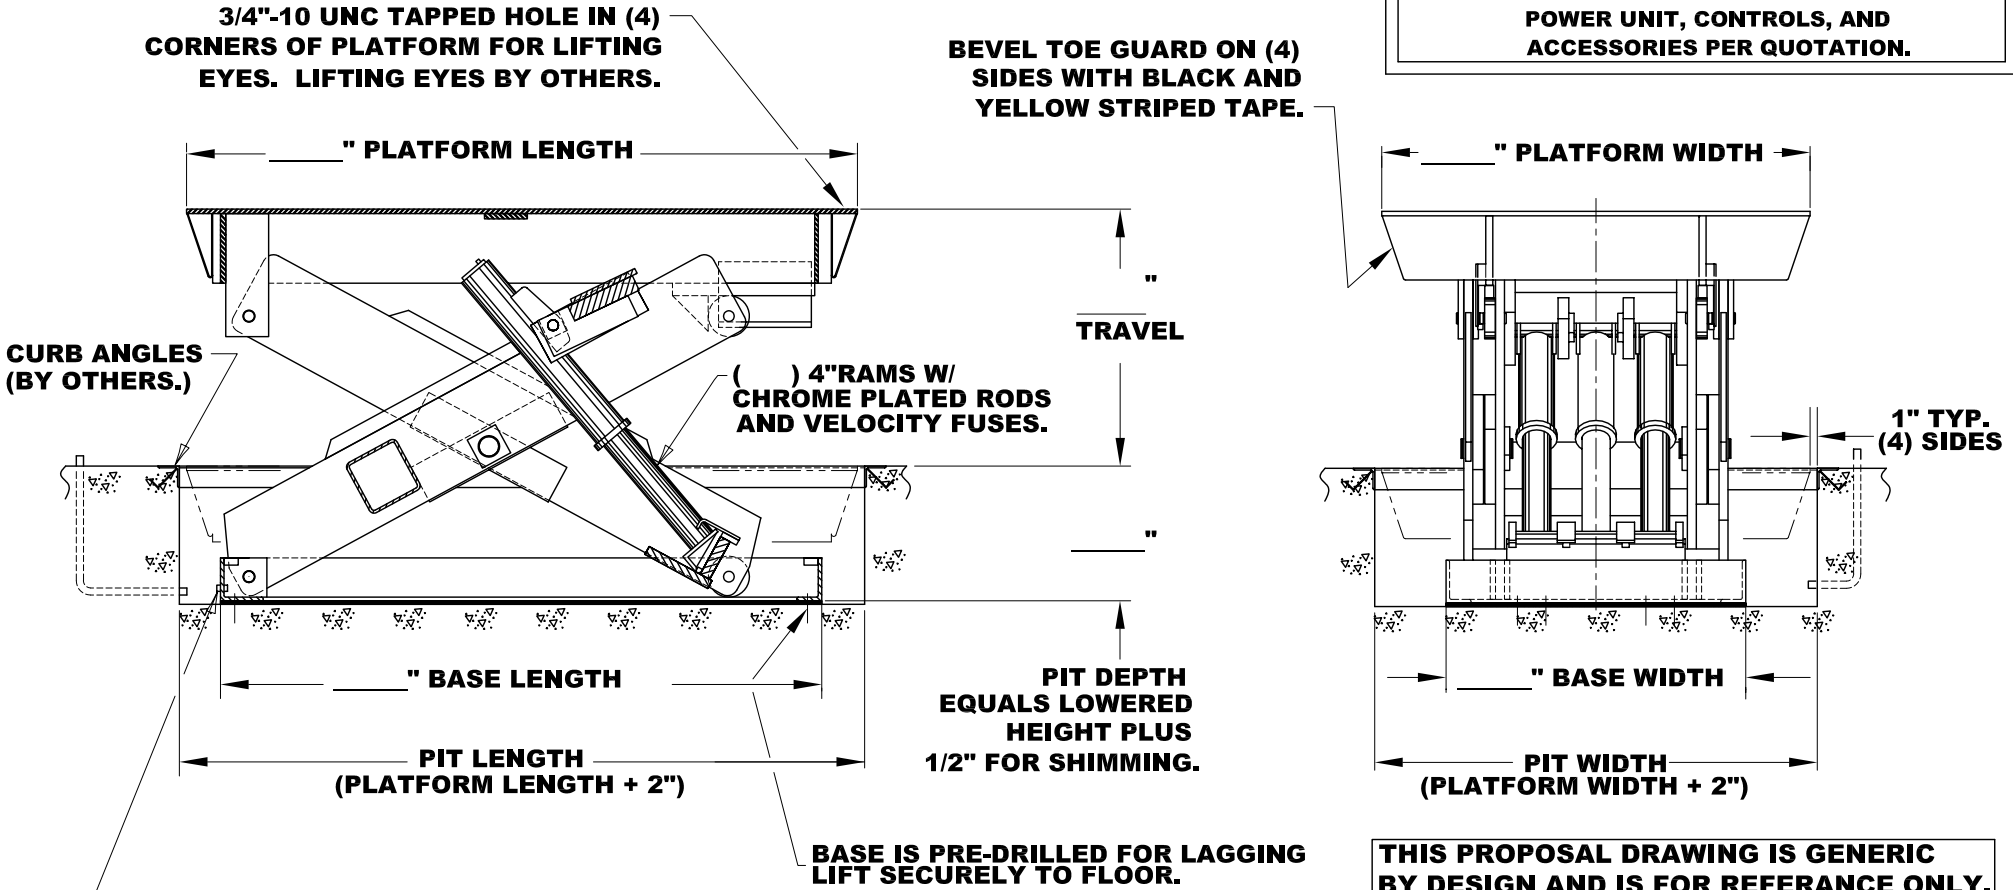

A 3/4" NPT REDUCER COUPLING IS PROVIDED IN BASE ASSEMBLY FOR CONNECTION OF CONNECTING HOSE.

\*MAINTENANCE DEVICE INCLUDED (NOT SHOWN).

THIS PROPOSAL DRAWING IS GENERIC BY DESIGN AND IS FOR REFERENCE ONLY. PLEASE CONTACT AUTOQUIP FOR JOB SPECIFIC APPROVAL DRAWINGS.

(NOT TO SCALE)  
PROPOSAL DRAWING  
QUOTE NO. \_\_\_\_\_

**SUPER TITAN - PIT MOUNTED**

82600210 REV 2, 10/1/01

© COPYRIGHT RESERVED  
AUTOQUIP CORPORATION  
2005



AUTOQUIP CORP.  
1058 W. INDUSTRIAL AVE.  
GUTHRIE, OK 73044-1058  
888-811-9876 WWW.AUTOQUIP.COM